

SINGLE TURN POTENTIOMETER

Model NP21

ø 22 mm

5 000 000 Cycles (Shaft Rotations)

Conductive Plastic



RESENZO

SMARTER SENSING AND CONTROL

Features:

- Excellent Lifetime
- Robust Construction
- Simple mounting

Applications:

- Electric Actuators
- Mining Machinery
- Construction Equipment
- Tractor Implements Control



Electrical Data:

Resistance Range	: 1kΩ, 2 kΩ, 5 kΩ, 10kΩ
Resistance Tolerance	: ± 20%
Eff. Ele. Travel	: 320° nom.
Linearity	: ± 2 %
Power Rating	: 1 W at 70°C
Resolution	: Essentially ∞
Max. Wiper Current	: 10 mA in case of failure (10 Sec)
Supply Voltage	: As per Diagram
Contact Resistance	: Within 2% CRV
Insulation Resistance	: 1GΩ at 500Vdc
Dielectric Strength	: 500Vac
Temperature Coefficient	: ± 400 ppm/°C

Mechanical Data:

Life	: 5 000 000 Cycles
Mech. Angle	: CR or 320°
Protection Class	: IP50
Running Torque	: 2 Nmm
Bearing	: Bush Bearing

Environmental Data:

Storage Temperature	: -40°C to +105°C
Operating Temperature	: -40°C to +105°C
Terminals	: Solder pads, gold plated

Material:

Housing	: Engg. Plastic
Shaft	: Stainless Steel

SINGLE TURN POTENTIOMETER

Model NP21

∅ 22 mm


5 000 000 Cycles (Shaft Rotations)

Conductive Plastic




RESENZO
SMARTER SENSING AND CONTROL

Dimensional Drawing:

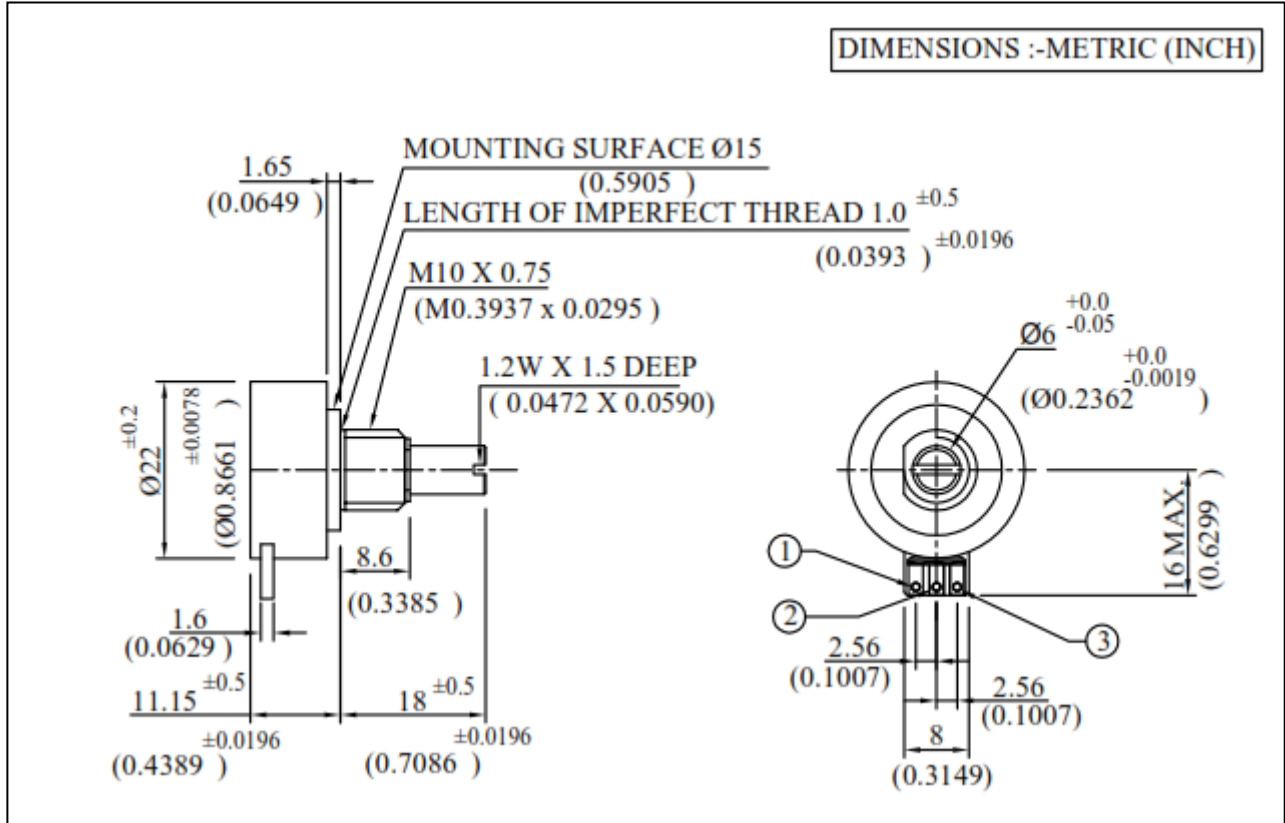

Connection Drawing:



Options:

Upon Request

Specifications subject to change without notice