

SINGLE TURN POTENTIOMETER

Model NPS22

∅ 22 mm

4 000 000 Cycles (Shaft Rotations)

Conductive Plastic




RESENZO
SMARTER SENSING AND CONTROL

Features:

- Excellent Lifetime
- Robust Construction
- Good linearity

Applications:

- Welding and Soldering Machines
- Nominal/Target Value setting
- Measuring Instruments
- Simple Servo Systems



Electrical Data:

Resistance Range	: 1kΩ, 2 kΩ, 5 kΩ, 10kΩ
Resistance Tolerance	: ± 20%
Eff. Elec. Travel	: 340° nom.
Linearity	: ± 2 %
Power Rating	: 1 W at 70°C
Resolution	: Essentially ∞
Max. Wiper Current	: 10 mA in case of Failure (10 Sec)
Contact Resistance	: Within 2% CRV
Insulation Resistance	: 1 GΩ at 500Vdc
Dielectric Strength	: 500Vac
Temperature Coefficient	: ± 400 ppm/°C

Mechanical Data:

Life	: 4 000 000 Cycles
Mech. Angle	: CR
Protection Class	: IP52
Running Torque	: 5 N.mm.
Bearing	: Ball Bearing

Environmental Data:

Storage Temperature	: -40°C to +105°C
Operating Temperature	: -40°C to +105°C
Terminals	: Brass, Gold plated

Material:


Housing	: Anodised Alu
Shaft	: Stainless Steel

SINGLE TURN POTENTIOMETER
Model NPS22
∅ 22 mm
4 000 000 Cycles (Shaft Rotations)
Conductive Plastic




RESENZO
 SMARTER SENSING AND CONTROL

Dimensional Drawing:

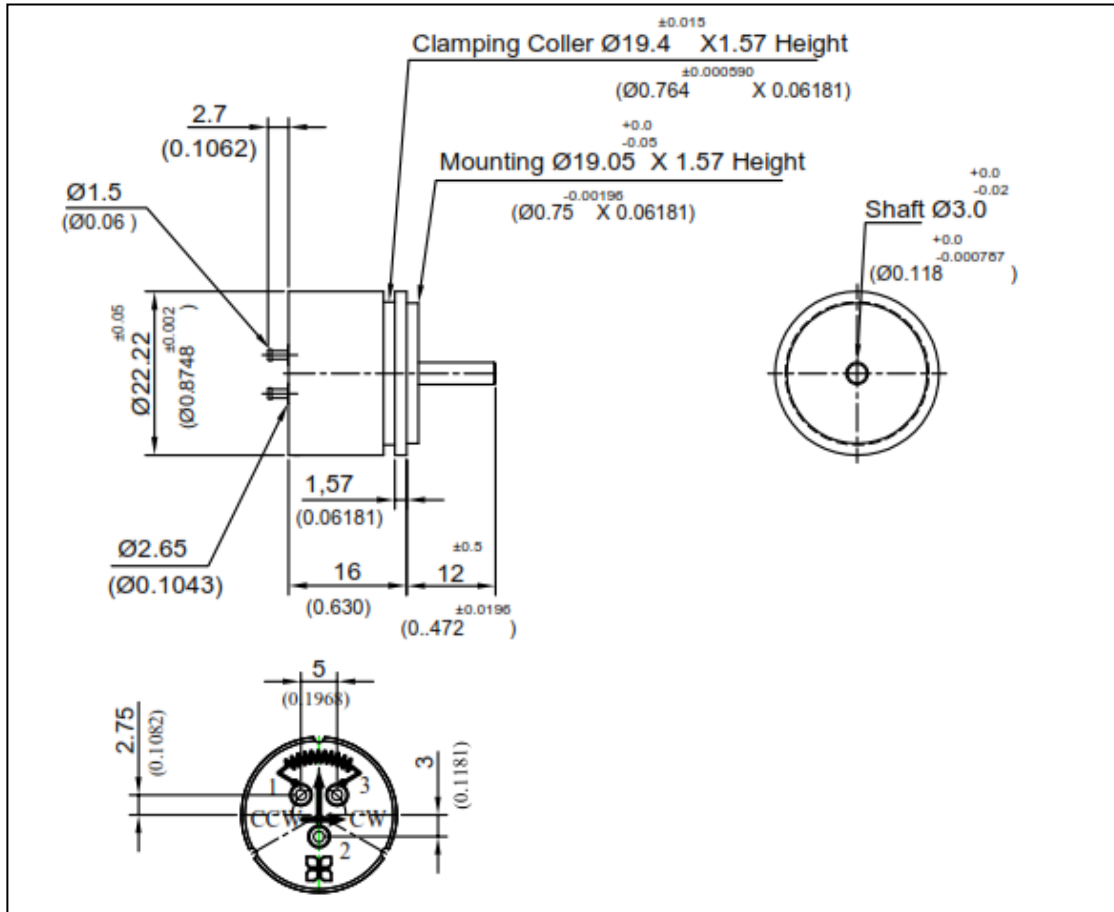

Connection Drawing:



Options:

Upon Request

Specifications subject to change without notice